

Fig. 909 - No-Thread Swivel Sway Brace Attachment



Component of State of California OSHPD Approved Seismic Restraints System

Size Range — 1" bracing pipe. For brace pipe sizes larger than 1", use TOLCO Fig. 980.

Material — Carbon Steel, hardened cone point engaging screw

Function — The structural component of a sway and seismic bracing system.

Features — This product's design incorporates a **concentric** attachment opening which is critical to the performance of structural seismic connections. NFPA 13 (2010) 9.3.5.8.4 indicates clearly that fastener table load values are based only on concentric loading. No threading of the bracing pipe is required. Open design allows for easy inspection of pipe engagement.

Application Note — The Fig. 909 is used in conjunction with the TOLCO Fig. 1000, Fig. 1001, Fig. 4 (A) or Fig. 4L pipe clamp, and joined together with bracing pipe. Sway brace assemblies are intended to be installed in accordance with NFPA 13 (or TOLCO State of California OSHPD Approved Seismic Restraint Manual) and the manufacturer's installation instructions. The required type, number and size of fasteners used for the structure attachment fitting shall be in accordance with NFPA 13 and/or OSHPD.

Approvals — Underwriters Laboratories Listed in the USA (**UL**) and Canada (**cUL**). Included in our Seismic Restraints Catalog approved by the State of California Office of Statewide Health Planning and Development (**OSHPD**). For additional load, spacing and placement information relating to OSHPD projects, please refer to the TOLCO Seismic Restraint Systems Guidelines.


Installation Instructions — The Fig. 909 is the structural or transitional attachment component of a longitudinal or lateral sway brace assembly. It is intended to be combined with the "bracing pipe" and TOLCO "braced pipe" attachment, Fig. 1000, 1001, 4A, 4B or 4L to form a complete bracing assembly. NFPA 13 and/or OSHPD guidelines should be followed.

To Install — Place the Fig. 909 onto the bracing pipe. Tighten the set bolt until head bottoms out on surface. Attachment can pivot for adjustment to proper brace angle.

Finish — Plain

Note — Available in Electro-Galvanized and HDG finish.

Order By — Figure number, pipe size and finish.

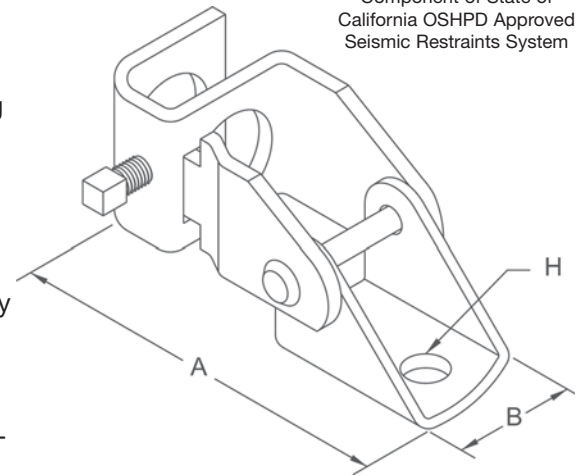

Dimensions • Weights

Pipe Size	A	B	Hole Size H*	Max. Design Load Lbs.	Max. Design Load Lbs. w/Washer	Approx. Wt./100
1	6	1 $\frac{5}{8}$	17/32	2015	2765	91

* Available with hole sizes to accommodate up to 3/4" fastener. Consult Factory.

TOLCO® brand bracing components are designed to be compatible **ONLY** with other TOLCO® brand bracing components, resulting in a Listed seismic bracing assembly. **DISCLAIMER** — NIBCO does **NOT** warrant against the failure of TOLCO® brand bracing components, in the instance that such TOLCO® brand bracing components are used in combination with products, parts or systems which are not manufactured or sold under the TOLCO® brand. NIBCO shall **NOT** be liable under any circumstance for any direct or indirect, incidental or consequential damages of any kind, including but not limited to loss of business or profit, where non-TOLCO brand bracing components have been, or are used.