


TECHNICAL DATA

4" MODEL F SERIES STRAIGHT THROUGH DELUGE VALVES FRICTION LOSS CHART

The Viking Corporation, 210 N Industrial Park Drive, Hastings MI 49058
Telephone: 269-945-9501 Technical Services 877-384-5464 Fax: 269-818-1680 Email: techsvcs@vikingcorp.com

FOR USE WITH ENGLISH PRACTICAL SYSTEM Where Flow is Measured in GPM and Pressure is Measured in PSI

Graph is for reference purposes.

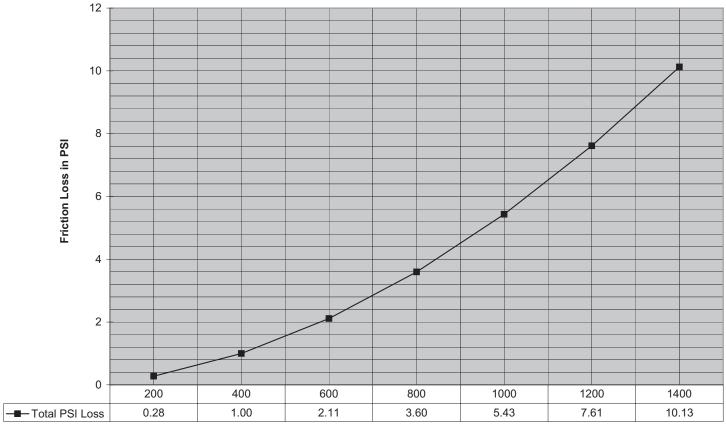

Flow in GPM (C = 120)

Friction Loss for the 4" Viking Model F Series Straight Through Deluge Valves is equivalent to 21 feet of 4" Schedule 40 (id = 4.026") Pipe (C = 120).

To calculate friction loss for the 4" (id = 4.026") Viking Model F Series Straight Through Deluge Valves at a specific flow, use the following formula:

$$P = \left(\frac{4.52 \times Q^{1.85}}{C^{1.85} \times 4.026^{4.87}}\right) \times 21$$

Where P = Friction Loss (PSI) Q = Flow in GPM C = Constant (=120)